


Value Tech. Mixveyor

| TECHNICAL DATA | VTM 110 | VTM 125 |
|----------------------|----------------------|----------------------|
| Total Outreach | 11 Meters | 12.5 Meters |
| Max Discharge Height | 6 Meters | 6.5 Meters |
| Max Conveying Depth | 2 Meters | 2 Meters |
| Delivery Capacity | 45 m ³ /h | 45 m ³ /h |
| Belt Width | 400 mm | 400 mm |
| Swivelling Range | 300 Degrees | 300 Degrees |
| Total Weight | 1250 Kg. | 1350 Kg. |

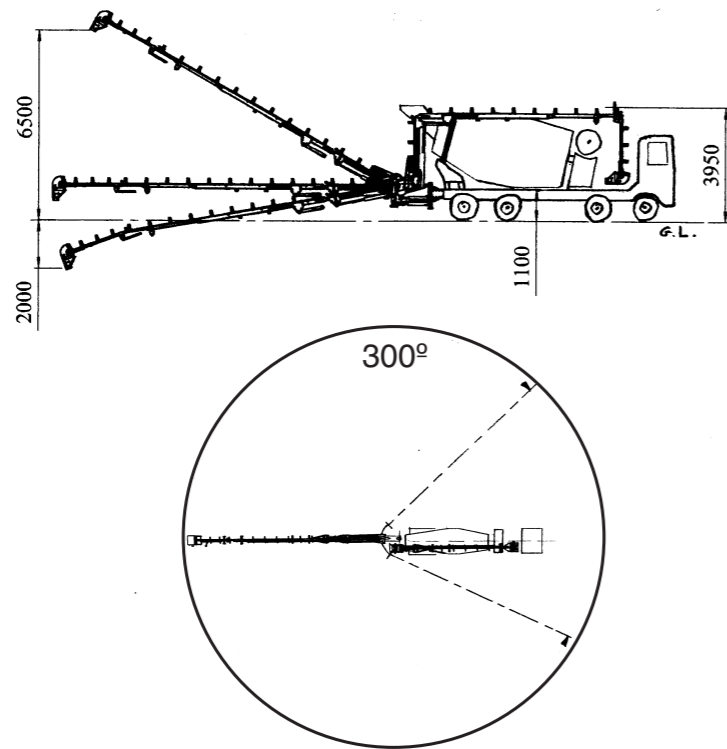

- Hydraulic Cylinders are fitted with Safety Check Valves.
- Conveyor Belt runs on maintenance free steel rollers.

MANUFACTURED BY



Value Tech Ltd.
Dromalour Ind. Park.
Kanturk, Co. Cork.
Ireland.

Tel: 00353 29 51000 Fax: 00353 29 51510
Email: info@valuetech.ie www.valuetech.ie




Value Tech. Mixveyor

TRUCK MOUNTED CONVEYORS FOR
LOW COST PLACEMENT OF CONCRETE

MODEL NO: V.T.M. 125



- DELIVERS 300° AROUND TRUCK MIXER
- UNIQUE TWIN-ACTION SWIVEL BOOM ASSY, FILLS THE LONGEST LENGTH OF FORMWORK, WITHOUT MOVING TRUCK.
- SINGLE LONGITUDINAL BEAM DESIGN, ALLOWS GOOD ACCESS FOR CLEANING AND MAINTENANCE.
- MANUFACTURED FROM HIGH TENSILE STEEL, GIVING OPTIMUM STRENGTH TO WEIGHT RATIO.

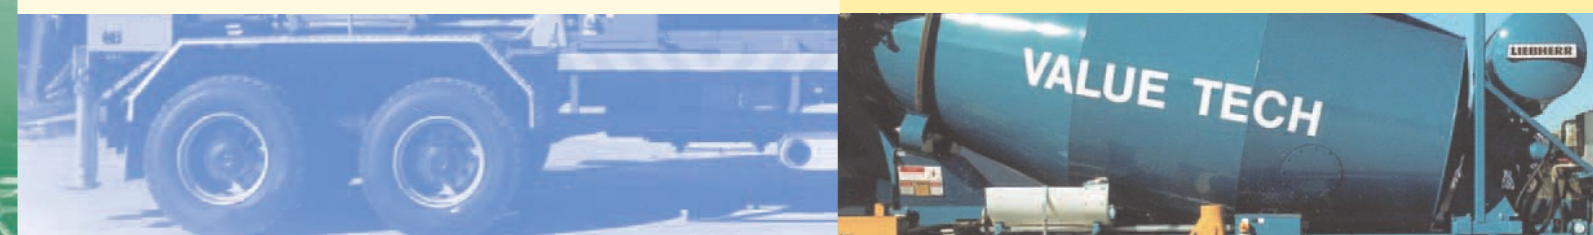

1. RADIO CONTROL SYSTEM.



The Radio Remote Control System allows safe, efficient, user-friendly operation, of the conveyor, as well as controlling delivery from mixer unit.

2. HYDRAULIC DEMOUNTABLE SYSTEM



The Hydraulic Demountable System, enables quick and easy attaching & detaching from Truck Mixer.

Can be mounted to 3 axel or 4 axel Truck Mixer Unit

All Hydraulic Cylinders are equipped with Rod Guards preventing damage to hydraulic seals.



The Mixveyor stows neatly within truck mixer parameters.



Auxiliary Control System, and all Electricities are fitted inside I.P. Rated, P.V.C. coated, steel enclosure.

